


# THERMOLEITUNG

THERMO WIRE

**Fe-CuNi Typ JX 2x0,22 mm<sup>2</sup> (DIN IEC 60584-3, Kl. 2) - Teflon**  
**Artikelnummer: 1334003 THL**

Fe-CuNi type JX 2x0.22 mm<sup>2</sup> (DIN IEC 60584-3, cl. 2) - teflon  
part number: 1334003 THL

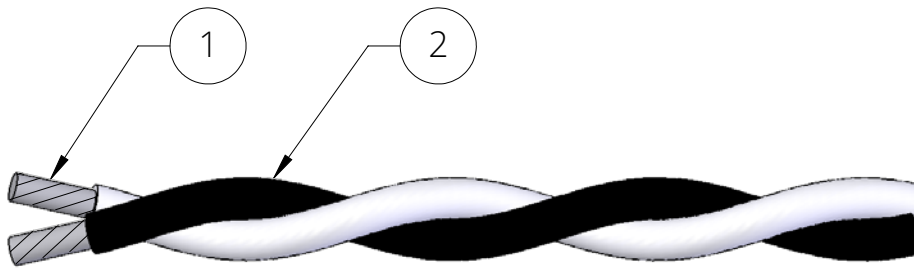

## Elektrische Eigenschaften

### Electric characteristics

**Betriebstemperatur der Isolation:** - 25 °C bis + 200 °C  
Operating temperature of insulation: - 25 °C to + 200 °C

**Prüfspannung:** effektiv 500 V  
Test voltage: effective 500 V

## Aufbau

### Structure

- ① **Thermoleitung: Fe-CuNi, Typ JX (DIN IEC 60584-3, Kl. 2), 2x0,22 mm<sup>2</sup> (7x0,20 mm)**  
Thermo wire: Fe-CuNi, type JX (DIN IEC 60584-3, cl. 2), 2x0.22 mm<sup>2</sup> (7x0.20 mm)
- ② **Aderisolation, Fp-PTFE-offene Verseilung, Farbe schwarz (+) und weiß (-), Ø des Leiters 2,4 ±0,2 mm**  
Core insulation, Fp-PTFE-open stranding, colours black (+) and white (-), Ø of wire 2.4 ±0.2 mm